
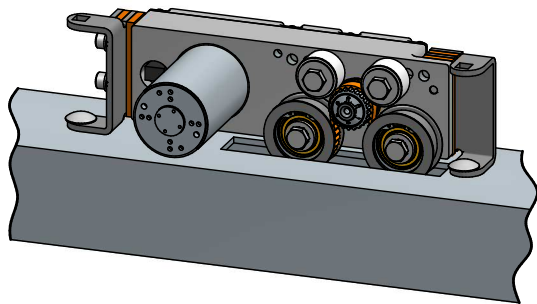


safe - compact - drive  
with redundant control unit  
type: SKA-ARX-0-1


## motor

scale 1:5

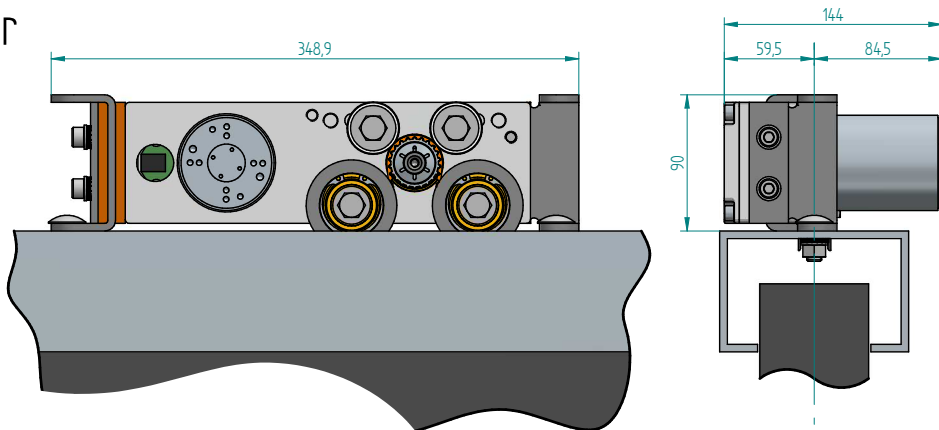


## toothbelt - tensioner

scale 1:5

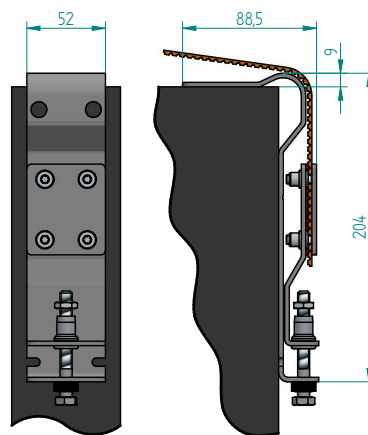



## toothbelt - clamp

scale 1:5

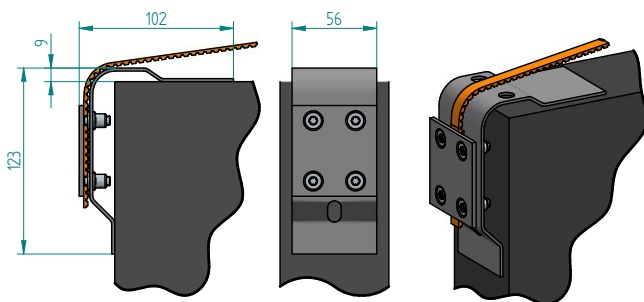

## control unit

scale 1:10

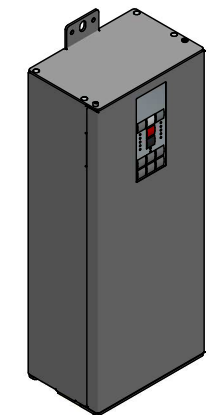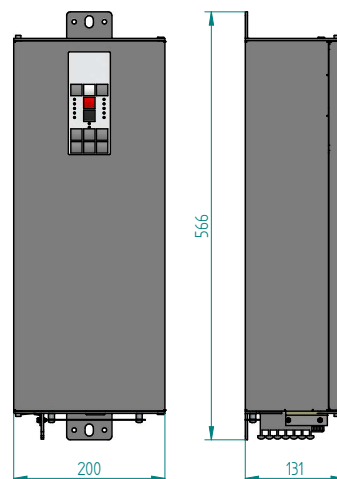

### technical data:

type	SKA-ARX-0-1
name of gearbox	VLM
pinion	AT5/22
drive means	toothbelt AT5, maximum tensile load : 700N, 4 - fold break resistance
motor designation	GR63x25
voltage	24V
output speed	3300/min
torque	0,14Nm
gearbox producer	Liberda Antriebstechnik
reduction	i = 136,1
nominal torque	5Nm
nominal pull force	150N
speed	8cm/s
The drive has:	sensitivity control, emergency electrical battery

The door can be moved by hand.  
For gate leaf weight max. 650kg

Liberda Antriebstechnik GmbH  
A-1150 Wien  
Geibelgasse 14-16  
☎ +43 1 8953244  
☎ +43 1 8953244 20  
✉ antriebe@liberda.eu  
www.liberda.eu  
HG Wien FN13227k